


USB 2.0 All-in-One Keystone/Panel Mount Coupler Cable (F/F), Angled Connector, White, 1 ft. (0.31 m)

MODEL NUMBER: **U060-001-KPA-WH**

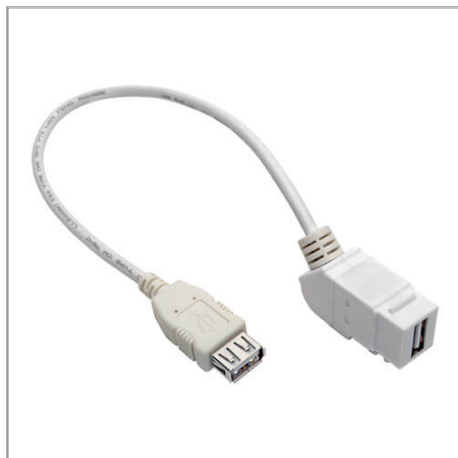

1 ft. cable with angled connector adds a USB-A female port to a fixed location, such as a keystone wall plate or panel. Optional panel mount adapter included for installation in a motherboard, podium or kiosk.

Features

Mounts a USB 2.0 Female Port in a Fixed Location

- USB-A female keystone jack snaps easily into wall plate or panel
- Optional panel mount adapter allows installation in motherboard, podium or kiosk
- Hides components out of sight to eliminate cable clutter
- Angled female connector permits more flexible installation in tight spaces
- White in color to match most common wall plates

Premium Construction for Superior Signal Transfer

- Premium foil and braid shielding protects against EMI/RFI line noise that can distort or destroy data
- Molded connectors with gold-plated contacts provide maximum conductivity and minimize data loss
- Integral strain relief helps cable and connectors move freely without stress or cracking
- Rugged PVC jacket protects twisted 28/24 AWG data/power lines
- Heavy-duty plastic housings designed for durability and long life

Specifications

OVERVIEW	
UPC Code	037332209917
Technology	USB 2.0 (High Speed)

Highlights

- Angled female connector allows more flexible installation in tight spaces
- Gold-plated contacts for max conductivity and minimum data loss
- Optional panel mount adapter secures to podium or kiosk
- Keystone design snaps easily into standard wall plate or panel
- White in color to match most common wall plates

Package Includes

- U060-001-KPA-WH USB 2.0 All-in-One Keystone/Panel Mount Coupler Cable (F/F), White, 1 ft.



Tripp Lite
1111 W. 35th Street
Chicago, IL 60609 USA
Telephone: 773.869.1234
www.tripplite.com

PHYSICAL	
Color	White
Material of Construction	PVC, ABS
Cable Jacket Color	White
Cable Outer Diameter (OD)	0.15mm
Cable Length (ft.)	1
Cable Length (m)	0.30
Cable Length (in.)	12
Cable Length (cm)	30.48
Shipping Dimensions (hwd / in.)	9.00 x 7.00 x 0.50
Shipping Dimensions (hwd / cm)	22.86 x 17.78 x 1.27
Shipping Weight (lbs.)	0.07
Shipping Weight (kg)	0.03
ENVIRONMENTAL	
Operating Temperature Range	32 to 104 F (0 to 40 C)
Storage Temperature Range	-4 to 140 F (-20 to 60 C)
Relative Humidity	10% to 90% RH, Non-Condensing
CONNECTIONS	
Side A - Connector 1	USB A (FEMALE)
Side B - Connector 1	USB A (FEMALE)
Connector Plating	Nickel
Contact Plating	Gold
FEATURES & SPECIFICATIONS	
USB Specification	USB 2.0 (up to 480 Mbps)
STANDARDS & COMPLIANCE	
Product Compliance	RoHS; CE (Europe)
WARRANTY	
Product Warranty Period (Worldwide)	Lifetime limited warranty

© 2022 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies:



Tripp Lite
1111 W. 35th Street
Chicago, IL 60609 USA
Telephone: 773.869.1234
www.tripplite.com

<https://www.tripplite.com/products/product-certification-agencies>